
django-adminlte2-templates

Sep 16, 2020

Contents:

1	Installation	3
1.1	Requirements	3
1.2	Installation	3
1.3	Static files	4
2	Quickstart	5
2.1	Using a layout template	5
2.2	Setting <code>settings.py</code> variables	8
2.3	Using template tags	9
3	Layouts and Components	11
3.1	Layouts	11
3.2	Pages	11
3.3	Components	12
3.4	Shortcuts	12
3.5	Extras	13
4	Template Blocks	15
4.1	General	15
4.2	Layouts	17
4.3	Pages	26
4.4	Extras	34
5	Template Tags and Filters	41
5.1	Tags	41
5.2	Filters	42
6	Settings	45
6.1	CDN	45
6.2	Footer	47
6.3	Gravatar	47
6.4	HTML	48
6.5	Page Title	48
6.6	Static	49
6.7	Theme	49
7	Changelog	51

7.1	1.4.0 (Sep-17-2020)	51
7.2	1.3.2 (May-27-2020)	52
7.3	1.3.1 (May-16-2020)	52
7.4	1.3.0 (May-15-2020)	52
7.5	1.2.0 (Apr-19-2020)	53
7.6	1.1.0 (Apr-13-2020)	54
8	Links	55
	Index	57

django-adminlte2-templates provides templates to easily integrate [AdminLTE 2](#) to your Django projects. Also included in the package is an optional AdminLTE-based theme for Django Admin.

This Django module assumes that you have prior experience with AdminLTE 2. Please check the [AdminLTE 2 documentation](#) online for your reference.

For a live version of the example project of this app, please check <https://djangoadminlte2templates.pythonanywhere.com/>.

1.1 Requirements

- Python (2.7, 3.4, 3.5, 3.6, 3.7, 3.8)
- Django (1.11, 2.0, 2.1, 2.2, 3.0, 3.1)

1.2 Installation

Installing using pip:

```
pip install django-adminlte2-templates
```

Add `adminlte2_templates` to `INSTALLED_APPS`:

```
INSTALLED_APPS = [  
    'adminlte2_templates',  
    'adminlte2_admin',  # Optional Django Admin theme  
    ..  
]
```

Add `adminlte2_templates.context_processors.template` to `context_processors`:

```
TEMPLATES = [  
    ..  
    'OPTIONS': {  
        'context_processors': [  
            ..  
            'adminlte2_templates.context_processors.template',  
        ],  
        ..  
    }  
]
```

1.3 Static files

This module provides static files for the following client-side libraries out-of-the-box:

- AdminLTE 2.4.18 (`static/adminlte2/adminlte-2.4.18`)
- Bootstrap 3.4.1 (`static/adminlte2/bootstrap-3.4.1`)
- DataTables 1.10.21 (`static/adminlte2/datatables-1.10.21`)
- Font Awesome 4.7.0 (`static/adminlte2/fontawesome-4.7.0`)
- HTML5Shiv 3.7.3 (`static/adminlte2/html5shiv-3.7.3`)
- jQuery 3.5.1 (`static/adminlte2/jquery-3.5.1`)
- Respond.js 1.4.2 (`static/adminlte2/respond-1.4.2`)
- Select2 4.0.13 (`static/adminlte2/select2-4.0.13`)

CHAPTER 2

Quickstart

Hint: An example Django project `example_project` is included in the module for your reference.

Warning: This quickstart assumes you already have **django-adminlte2-templates** installed. If you do not, please check the [Installation](#) section for more details.

2.1 Using a layout template

Note: For more information on the available layout and component templates, please check the [Layouts and Components](#) section. You may also check the [Template Blocks](#) section for more details on the available block tags to use.

In this example, we will extend the *fixed* sidebar template (`adminlte2/layouts/fixed.html`).

Extending `adminlte2/layouts/fixed.html`:

```
{% extends 'adminlte2/layouts/fixed.html' %}

{% block title %}Fixed Layout{% endblock title %}

{% block page_title %}Fixed Layout{% endblock page_title %}

{% block page_description %}Example for extending the fixed sidebar template{%
↪endblock page_description %}

{% block breadcrumbs %}
    <li><a href="{% url 'layouts:index' %}">Layouts</a></li>
    <li><a href="{% url 'layouts:fixed' %}">Fixed</a></li>
```


(continues on next page)

(continued from previous page)

```
{% endblock breadcrumbs %}

{% block content %}
    <div class="box">
        <div class="box-header with-border">
            <h3 class="box-title">Title</h3>
        </div>
        <div class="box-body">
            Body
        </div>
        <div class="box-footer">
            Footer
        </div>
    </div>
{% endblock content %}
```

Using the extended template will generate:

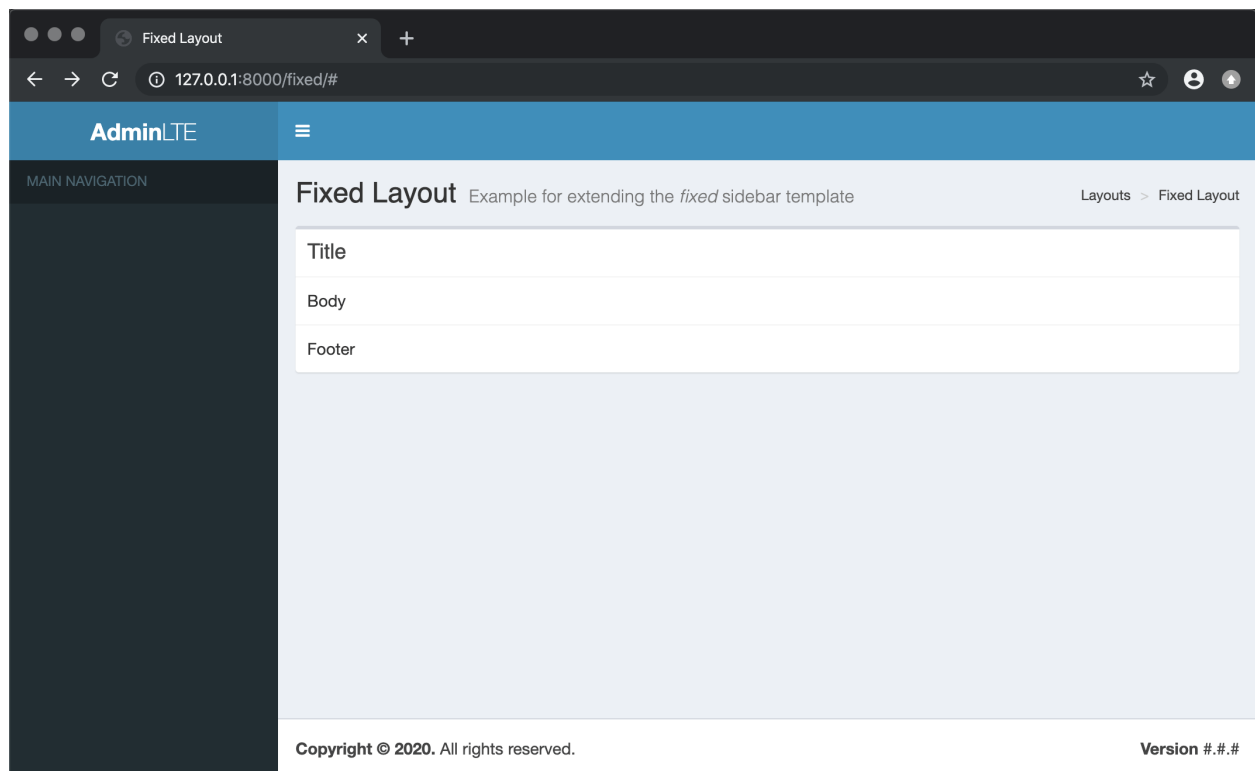

You can also override the sidebar (`adminlte2/components/sidebar.html`), header (`adminlte2/components/header.html`), and footer (`adminlte2/components/footer.html`) component templates to update their content:

Overriding `adminlte2/components/sidebar.html`:

```
{% extends 'adminlte2/components/sidebar.html' %}

{% block sidebar_items %}
    <li class="treeview active">
        <a href="#">
            <i class="fa fa-circle"></i> <span>Layouts</span>
```

(continues on next page)

(continued from previous page)

```

        <span class="pull-right-container">
            <i class="fa fa-angle-left pull-right"></i>
        </span>
    </a>
    <ul class="treeview-menu">
        <li><a href="{% url 'layouts:boxed' %}"><i class="fa fa-circle-o"></i>
↳ Boxed</a></li>
        <li><a href="{% url 'layouts:collapsed' %}"><i class="fa fa-circle-o"></i>
↳ Collapsed</a></li>
        <li class="active"><a href="{% url 'layouts:fixed' %}"><i class="fa fa-
↳ circle-o"></i> Fixed</a></li>
        <li><a href="{% url 'layouts:top' %}"><i class="fa fa-circle-o"></i> Top
↳ Navigation</a></li>
    </ul>
</li>
{% endblock sidebar_items %}

```

Overriding adminlte2/components/header.html:

```

{% extends 'adminlte2/components/header.html' %}

{% block logo_lg %}
    <b>Ex</b>ample
{% endblock logo_lg %}

{% block logo_mini %}
    <b>Ex</b>
{% endblock logo_mini %}

{% block header_items %}
    <li><a href="#"><i class="fa fa-user"></i>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;& Profile</a></li>
    <li><a href="#"><i class="fa fa-sign-out"></i>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;& Sign Out</a></li>
{% endblock header_items %}

```

Overriding adminlte2/components/footer.html:


```

{% extends 'adminlte2/components/footer.html' %}

{% block footer_version %}
    1.0.0
{% endblock footer_version %}

```

Overriding the aforementioned component templates will generate:

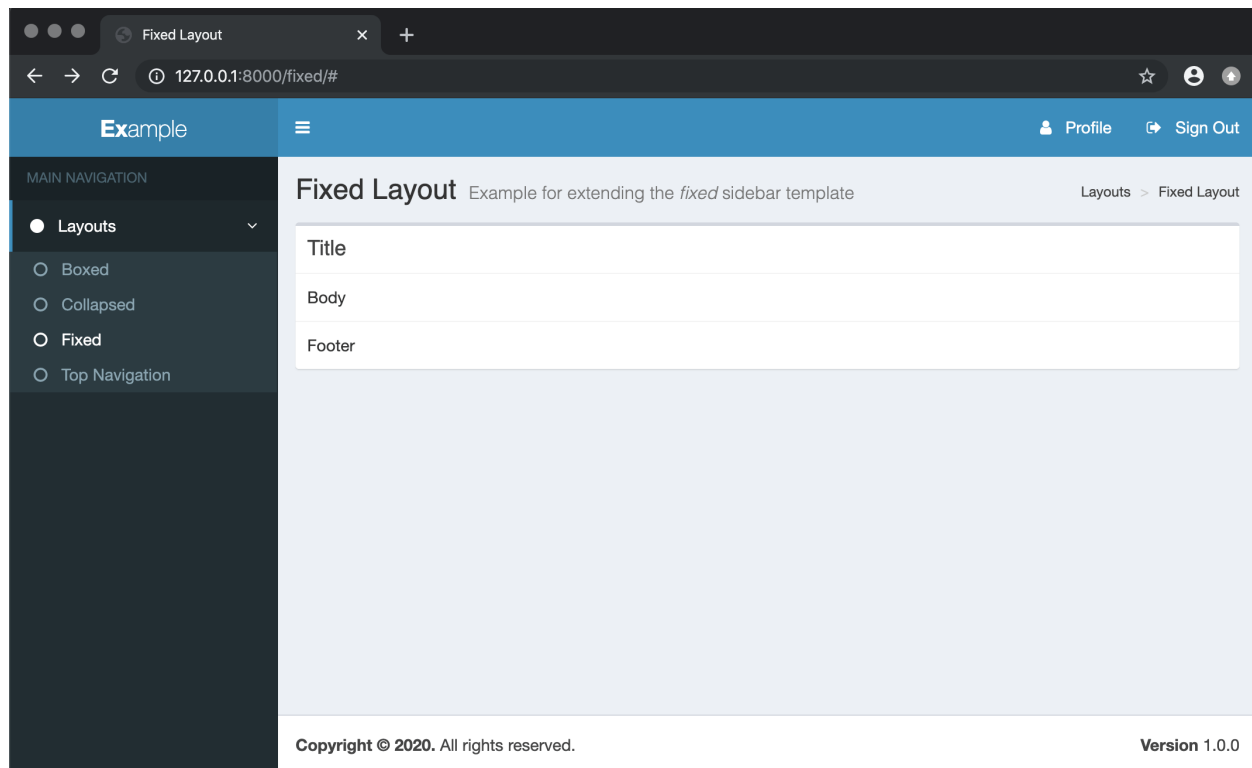


2.2 Setting settings.py variables

Note: For more information on the available `settings.py` variables that you can use, please check the [Settings](#) section.

You can change the AdminLTE 2 skin theme by adding `ADMINLTE_SKIN_THEME` to `settings.py`:

```
#
# Valid values are: 'skin-black', 'skin-black-light', 'skin-blue', 'skin-blue-light',
# 'skin-green', 'skin-green-light', 'skin-purple', 'skin-purple-light',
# 'skin-red', 'skin-red-light', 'skin-yellow', 'skin-yellow-light'.
#
# Defaults to 'skin-blue'.
#
ADMINLTE_SKIN_THEME = 'skin-orange-light'
```

Updating the page will generate:

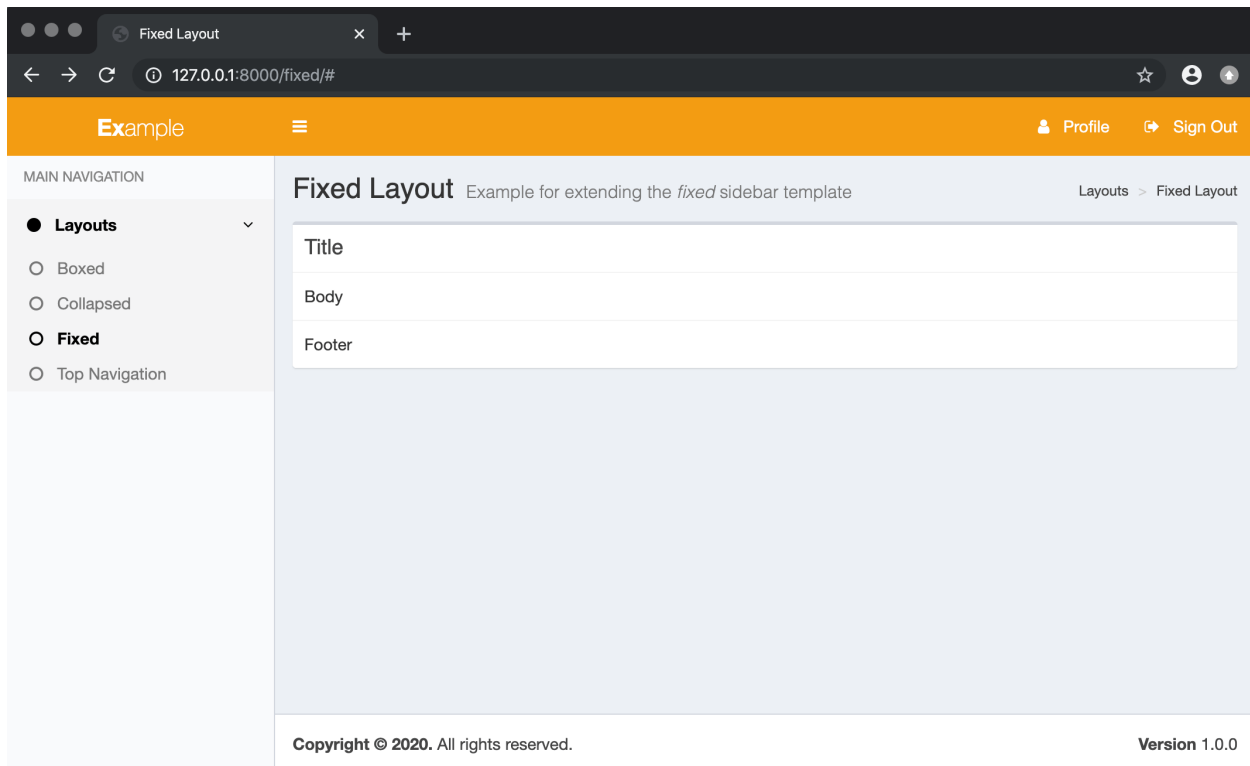

2.3 Using template tags

Note: For more information on the available template tags that you can use, please check the [Template Tags](#) section.

You can use the `{% add_active %}` template tag to automate setting the sidebar links of the current page as active. For example, updating the sidebar `adminlte2/components/sidebar.html` component template:

```
{% extends 'adminlte2/components/sidebar.html' %}

{% load adminlte2_tags %}

{% block sidebar_items %}
    <li class="treeview {% add_active 'layouts:index' %}">
        <a href="#">
            <i class="fa fa-circle"></i> <span>Layouts</span>
            <span class="pull-right-container">
                <i class="fa fa-angle-left pull-right"></i>
            </span>
        </a>
        <ul class="treeview-menu">
            <li class="{% add_active 'layouts:boxed' %}"><a href="{% url
→ 'layouts:boxed' %}"><i class="fa fa-circle-o"></i> Boxed</a></li>
            <li class="{% add_active 'layouts:collapsed' %}"><a href="{% url
→ 'layouts:collapsed' %}"><i class="fa fa-circle-o"></i> Collapsed</a></li>
            <li class="{% add_active 'layouts:fixed' %}"><a href="{% url
→ 'layouts:fixed' %}"><i class="fa fa-circle-o"></i> Fixed</a></li>
```

(continues on next page)

(continued from previous page)

```
        <li class="{% add_active 'layouts:top' %}"><a href="{% url 'layouts:top'
→%}"><i class="fa fa-circle-o"></i> Top Navigation</a></li>
    </ul>
</li>
{% endblock sidebar_items %}
```

3.1 Layouts

adminlte2/base.html

Base AdminLTE 2 layout template.

adminlte2/layouts/boxed.html

AdminLTE 2 template for *boxed* layout option.

See <https://adminlte.io/themes/AdminLTE/pages/layout/boxed.html> for a live example of this template.

adminlte2/layouts/collapsed_sidebar.html

AdminLTE 2 template for *collapsed sidebar* layout option.

See <https://adminlte.io/themes/AdminLTE/pages/layout/collapsed-sidebar.html> for a live example of this template.

adminlte2/layouts/fixed.html

AdminLTE 2 template for *fixed* layout option.

See <https://adminlte.io/themes/AdminLTE/pages/layout/fixed.html> for a live example of this template.

adminlte2/layouts/top_navigation.html

AdminLTE 2 template for *top navigation* layout option.

See <https://adminlte.io/themes/AdminLTE/pages/layout/top-nav.html> for a live example of this template.

3.2 Pages

adminlte2/layouts/login.html

AdminLTE 2 login page template.

See <https://adminlte.io/themes/AdminLTE/pages/examples/login.html> for a live example of this template.

adminlte2/layouts/register.html

AdminLTE 2 register page template.

See <https://adminlte.io/themes/AdminLTE/pages/examples/register.html> for a live example of this template.

3.3 Components

adminlte2/components/sidebar.html

Sidebar navigation template.

Please check the [Template Blocks > Layouts > Sidebar](#) section for more information on the available template blocks that can be used to customize this component.

adminlte2/components/control.html

Control navigation template.

Please check the [Template Blocks > Layouts > Control](#) section for more information on the available template blocks that can be used to customize this component.

adminlte2/components/header.html

Header navigation bar template for *boxed*, *collapsed sidebar*, and *fixed* layout options.

Please check the [Template Blocks > Layouts > Header](#) section for more information on the available template blocks that can be used to customize this component.

adminlte2/components/header_top_navigation.html

Header navigation bar template for *top navigation* layout option.

Please check the [Template Blocks > Layouts > Header](#) section for more information on the available template blocks that can be used to customize this component.

adminlte2/components/messages.html

Django Messages alert box template.

Please check the [Template Blocks > Layouts > Messages](#) section for more information on the available template blocks that can be used to customize this component.

adminlte2/components/footer.html

Footer template.

Please check the [Template Blocks > Layouts > Footer](#) section for more information on the available template blocks that can be used to customize this component.

adminlte2/components/footer_top_navigation.html

Footer template for *top navigation* layout option.

Please check the [Template Blocks > Layouts > Footer](#) section for more information on the available template blocks that can be used to customize this component.

3.4 Shortcuts

django-adminlte2-templates provides shortcuts to some commonly-used layout template modifications:

adminlte2/shortcuts/barebones/*

Remove content header (page title, page description, breadcrumb navigation), footer, and control sidebar for *boxed.html*, *collapsed_sidebar.html*, *fixed.html*, and *top_navigation.html*.

adminlte2/shortcuts/no_content_header/*

Remove content header (page title, page description, breadcrumb navigation) for boxed.html, collapsed_sidebar.html, fixed.html, and top_navigation.html.

adminlte2/shortcuts/no_breadcrumbs/*

Remove breadcrumb navigation for boxed.html, collapsed_sidebar.html, fixed.html, and top_navigation.html.

adminlte2/shortcuts/no_footer/*

Remove footer for boxed.html, collapsed_sidebar.html, fixed.html, and top_navigation.html.

adminlte2/shortcuts/no_breadcrumbs_footer/*

Remove footer and breadcrumb navigation for boxed.html, collapsed_sidebar.html, fixed.html, and top_navigation.html.

3.5 Extras

adminlte2/extras/paginator.html

Layout template file for template tag {% paginator %}.

Please check the [Template Tags > Tags](#) section for more information on {% paginator %}. You may also check the [Template Blocks > Extras > Paginator](#) section for more information on the available template blocks that can be used to customize this template.

django-adminlte2-templates template blocks:

4.1 General

4.1.1 <html> content

html_attribute

HTML <html> attributes.

Default:

```
<html {% block html_attribute %}lang="{% block html_lang %}{{ ADMINLTE_HTML_LANG }}  
→}{% endblock html_lang %}" dir="{% block html_lang_bidi %}{{ ADMINLTE_HTML_LANG_  
→BIDI }}{% endblock html_lang_bidi %}" {% endblock html_attribute %}>
```

html_lang

HTML <html> lang attribute.

Default:

```
lang="{% block html_lang %}{{ ADMINLTE_HTML_LANG }}{% endblock html_lang %}"
```

html_lang_bidi

HTML <html> dir attribute

Default:

```
dir="{% block html_lang_bidi %}{{ ADMINLTE_HTML_LANG_BIDI }}{% endblock html_lang_  
→bidi %}"
```

4.1.2 <head> content

extra_head

Additional HTML tags in <head>.

meta

<meta> tags in <head>.

Default:

```
{% block meta %}
    {% include 'adminlte2/components/_meta.html' %}
{% endblock meta %}
```

title

HTML <title> tag text.

stylesheets

CSS links in <head>.

Default:

```
{% block stylesheets %}
    {% include 'adminlte2/components/_stylesheets.html' %}
{% endblock stylesheets %}
```

stylesheets_fix

Custom CSS links in <head>. Included custom CSS files are:

- adminlte2/fix/header_dropdown_link_color.css: Custom CSS to fix header dropdown link color without using .notifications-menu, .messages-menu, or .tasks-menu classes

Default:

```
{% block stylesheets_fix %}
    {% include 'adminlte2/components/_stylesheets_fix.html' %}
{% endblock stylesheets_fix %}
```

favicon

Favicon links in <head>:

Default:

```
{% block favicon %}
    <link rel="shortcut icon" href="{% block favicon_icon %}{% static 'favicon.ico' %}
    ↳ '{% endblock favicon_icon %}'">
{% endblock favicon %}
```

favicon_image

Favicon image path.

Default:

```
<link rel="shortcut icon" href="{% block favicon_icon %}{% static 'favicon.ico' %}
    ↳ '{% endblock favicon_icon %}'">
```

shim

HTML 5 Shim JavaScript links in <head>.

Default:

```
{% block shim %}
    {% if ADMINLTE_USE_SHIM %}
        {% include 'adminlte2/components/_shim.html' %}
    {% endif %}
{% endblock shim %}
```

javascripts

JavaScript links in <head>.

Default:

```
{% block javascripts %}
    {% include 'adminlte2/components/_javascripts.html' %}
{% endblock javascripts %}
```

4.1.3 <body> content

body

HTML <body> tag content.

body_attribute

HTML <body> attributes.

Default:

```
<body {% block body_attribute %}class="{% block body_class %}hold-transition {%_
↪block skin_style %}{{ ADMINLTE_SKIN_STYLE }}{% endblock skin_style %} {%_
↪endblock body_class %}"{% endblock body_attribute %}>
```

body_class

HTML <body> tag class attributes.

Default:

```
{% block body_class %}hold-transition {{ ADMINLTE_SKIN_STYLE }}{% endblock body_
↪class %}
```

skin_style

HTML <body> tag class attribute for AdminLTE 2 skin theme.

Valid values are: 'skin-black', 'skin-black-light', 'skin-blue', 'skin-blue-light', 'skin-green', 'skin-green-light', 'skin-purple', 'skin-purple-light', 'skin-red', 'skin-red-light', 'skin-yellow', 'skin-yellow-light'.

javascripts_body

JavaScript links in <body>.

4.2 Layouts

Sidebar and top navigation layout template blocks:

4.2.1 Templates

header_template

AdminLTE 2 navigation header template.

Default:

```
{% block header_template %}
    {% include 'adminlte2/components/header.html' %}
{% endblock header_template %}
```

sidebar_template

AdminLTE 2 navigation sidebar template.

Default:

```
{% block sidebar_template %}
    {% include 'adminlte2/components/sidebar.html' %}
{% endblock sidebar_template %}
```

messages_template

Django messages alert box template.

Default:

```
{% block messages_template %}
    {% include 'adminlte2/components/messages.html' %}
{% endblock messages_template %}
```

control_template

AdminLTE 2 control sidebar template.

Default:

```
{% block control_template %}
    {% include 'adminlte2/components/control.html' %}
{% endblock control_template %}
```

footer_template

AdminLTE 2 footer template.

Default:

```
{% block footer_template %}
    {% include 'adminlte2/components/footer.html' %}
{% endblock footer_template %}
```

4.2.2 Content

content_template

AdminLTE 2 page content code.

Default:

```
{% block content_template %}
    <div class="content-wrapper">
        {% block content_wrapper %}
    </div>
{% endblock content_template %}
```

(continues on next page)

(continued from previous page)

```

        {% block no_content_header %}
            <section class="content-header">
                {% block content_header %}
                    {% block no_page_title %}
                        <h1>
                            {% block page_title %}{% endblock page_title %}
                            <small>{% block page_description %}{% endblock_
→page_description %}</small>
                        </h1>
                    {% endblock no_page_title %}

                    {% block no_breadcrumbs %}
                        <ol class="breadcrumb">
                            {% block breadcrumbs %}{% endblock breadcrumbs %}
                        </ol>
                    {% endblock no_breadcrumbs %}
                {% endblock content_header %}
            </section>
        {% endblock no_content_header %}

        {% block content_body %}
            <section class="content">
                {% block messages_template %}
                    {% include 'adminlte2/components/messages.html' %}
                {% endblock messages_template %}

                {% block content %}
                {% endblock content %}
            </section>
        {% endblock content_body %}
    {% endblock content_wrapper %}
</div>
{% endblock content_template %}

```

content_wrapper

Page content <div class="content-wrapper"> code.

content_header

Page content header code. Contains the page title and description, and breadcrumb navigation.

Default:

```

{% block content_header %}
    {% block no_page_title %}
        <h1>
            {% block page_title %}{% endblock page_title %}
            <small>{% block page_description %}{% endblock page_description %}</
→small>
        </h1>
    {% endblock no_page_title %}

    {% block no_breadcrumbs %}
        <ol class="breadcrumb">
            {% block breadcrumbs %}{% endblock breadcrumbs %}
        </ol>
    {% endblock no_breadcrumbs %}
{% endblock content_header %}

```

no_content_header

Declare block as empty to remove page content header (page title and description, breadcrumb navigation):

```
{% block no_content_header %}{% endblock no_content_header %}
```

page_title

Page title text that will be displayed in the content header.

page_description

Page description text that will be displayed in the content header.

no_page_title

Declare block as empty to remove page title and description text:

```
{% block no_page_title %}{% endblock no_page_title %}
```

breadcrumbs

Breadcrumb navigation that will be displayed in the content header.

no_breadcrumbs

Declare block as empty to remove breadcrumb navigation:

```
{% block no_breadcrumbs %}{% endblock no_breadcrumbs %}
```

content_body

Page content body code. Contains the Django messages alert boxes and page main content.

Default:

```
{% block content_body %}
    <section class="content">
        {% block messages_template %}
            {% include 'adminlte2/components/messages.html' %}
        {% endblock messages_template %}

        {% block content %}
        {% endblock content %}
    </section>
{% endblock content_body %}
```

content

Page main content.

4.2.3 Header

Template blocks to customize the header component (`adminlte2/components/header.html`, `adminlte2/components/header_top_navigation.html`).

django-adminlte2-templates supports header for both **sidebar** (*boxed*, *collapsed*, *fixed*) and **top navigation** layouts:

logo

Header logo code.

Default for *sidebar*:

```
{% block logo %}
    <a href="{% block logo_href %}/{% endblock %}" class="logo">
        <span class="logo-mini">{% block logo_mini %}<b>A</b>LTE{% endblock logo_
mini %}</span>
```

(continues on next page)

(continued from previous page)

```

    <span class="logo-lg">{% block logo_lg %}<b>Admin</b>LTE{% endblock logo_
↪lg %}</span>
    </a>
{% endblock logo %}

```

Default for *top navigation*:

```

{% block logo %}
    <a href="{% block logo_href %}/{% endblock logo_href %}" class="navbar-brand">
        {% block logo_lg %}
            <b>Admin</b>LTE
        {% endblock logo_lg %}
    </a>
{% endblock logo %}

```

logo_href

Header logo link URL.

Defaults to /.

logo_mini

(*sidebar* only) Header logo content when the *sidebar* content is collapsed.

Default:

```

{% block logo_mini %}<b>A</b>LTE{% endblock logo_mini %}

```

logo_lg

Header logo content when *sidebar* content is exposed, or for *top navigation* layout.

Default:

```

{% block logo_lg %}<b>Admin</b>LTE{% endblock logo_lg %}

```

header_content

Header main content code.

Default for *sidebar*:

```

{% block header_content %}
    <nav class="navbar navbar-static-top">
        {% block sidebar_toggle %}
            <a href="#" class="sidebar-toggle" data-toggle="push-menu" role=
↪"button">
                <span class="sr-only">
                    {% block sidebar_toggle_text %}Toggle navigation{% endblock_
↪sidebar_toggle_text %}
                </span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
            </a>
        {% endblock sidebar_toggle %}

        <div class="navbar-custom-menu">
            <ul class="nav navbar-nav">
                {% block header_items %}
                {% endblock header_items %}
            </ul>
        </div>
    </nav>
{% endblock header_content %}

```

(continues on next page)

(continued from previous page)

```

        </ul>
    </div>
</nav>
{% endblock header_content %}

```

Default for *top navigation*:

```

{% block header_content %}
    <div class="collapse navbar-collapse pull-left" id="navbar-collapse">
        <ul class="nav navbar-nav">
            {% block header_items_left %}
            {% endblock header_items_left %}
        </ul>
    </div>

    <div class="navbar-custom-menu">
        <ul class="nav navbar-nav">
            {% block header_items %}
                {% block header_items_right %}
            {% endblock header_items_right %}
            {% endblock header_items %}
        </ul>
    </div>
{% endblock header_content %}

```

header_items

Header (right) navigation items.

header_items_left

(*top navigation* only) Header left navigation items.

header_items_right

(*top navigation* only) Header right navigation items. Alias for `header_items`.

Default:

```

{% block header_items %}
    {% block header_items_right %}
    {% endblock header_items_right %}
{% endblock header_items %}

```

sidebar_toggle

(*sidebar* only) Sidebar toggle button for sidebar (*boxed*, *collapsed*, *fixed*) layouts.

Default:

```

{% block sidebar_toggle %}
    <a href="#" class="sidebar-toggle" data-toggle="push-menu" role="button">
        <span class="sr-only">
            {% block sidebar_toggle_text %}Toggle navigation{% endblock sidebar_
→toggle_text %}
        </span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
    </a>
{% endblock sidebar_toggle %}

```

sidebar_toggle_text

(*sidebar* only) Sidebar toggle button screenreader text for sidebar (*boxed, collapsed, fixed*) layouts.

Defaults to Toggle navigation.

header_toggle

(*top navigation* only) Responsive toggle button for left navigation links.

Default:

```
{% block header_toggle %}
    <button type="button" class="navbar-toggle collapsed"
        data-toggle="collapse" data-target="#navbar-collapse">
        <span class="sr-only">
            {% block header_toggle_text %}Toggle navigation{% endblock header_
↪toggle_text %}
        </span>
        <i class="fa fa-bars"></i>
    </button>
{% endblock header_toggle %}
```

header_toggle_text

(*top navigation* only) Responsive toggle button screenreader text for left navigation links.

Defaults to Toggle navigation.

4.2.4 Sidebar

Template blocks to customize the sidebar component (adminlte2/components/sidebar.html):

sidebar_title

Sidebar navigation title text.

Default:

```
<li class="header">{% block sidebar_title %}MAIN NAVIGATION{% endblock sidebar_
↪title %}</li>
```

no_sidebar_title

Declare block as empty to remove sidebar title:

```
{% block no_sidebar_title %}{% endblock no_sidebar_title %}
```

sidebar_form

Sidebar space for form elements.

sidebar_items

Sidebar navigation items.

4.2.5 Control

Template blocks to customize the control component (adminlte2/components/control.html):

control_items

Control sidebar navigation items.

control_tabs

Control sidebar navigation tab contents.

4.2.6 Messages

Template blocks to customize the Django messages alert boxes component (adminlte2/components/messages.html):

message_debug

DEBUG alert box.

Default:

```
<div class="alert alert-info alert-dismissible">
  <button type="button" class="close" data-dismiss="alert" aria-hidden="true">&
    ↪times;</button>
  {{ message }}
</div>
```

message_info

INFO alert box.

Default:

```
<div class="alert alert-info alert-dismissible">
  <button type="button" class="close" data-dismiss="alert" aria-hidden="true">&
    ↪times;</button>
  {{ message }}
</div>
```

message_success

SUCCESS alert box.

Default:

```
<div class="alert alert-success alert-dismissible">
  <button type="button" class="close" data-dismiss="alert" aria-hidden="true">&
    ↪times;</button>
  {{ message }}
</div>
```

message_warning

WARNING alert box.

Default:

```
<div class="alert alert-warning alert-dismissible">
  <button type="button" class="close" data-dismiss="alert" aria-hidden="true">&
    ↪times;</button>
  {{ message }}
</div>
```

message_error

ERROR alert box.

Default:

```
<div class="alert alert-error alert-dismissible">
  <button type="button" class="close" data-dismiss="alert" aria-hidden="true">&
    ↪times;</button>
  {{ message }}
</div>
```

message_default

Custom message alert box.

Default:

```
<div class="alert alert-info alert-dismissible">
  <button type="button" class="close" data-dismiss="alert" aria-hidden="true">&
  ↪times;</button>
  {{ message }}
</div>
```

4.2.7 Footer

Template blocks to customize the footer components (adminlte2/components/footer.html), (adminlte2/components/footer_top_navigation):

footer_content

Footer content code.

Default:

```
{% block footer_content %}

  <div class="pull-right hidden-xs">
    {% block footer_right %}
      <b>Version</b> {% block footer_version %}#.#.#{% endblock footer_
  ↪version %}
    {% endblock footer_right %}
  </div>

  {% block footer_left %}
    {% block footer_legal %}
      <strong>Copyright &copy; {% now "Y" %}.</strong> All rights reserved.
    {% endblock footer_legal %}
  {% endblock footer_left %}

{% endblock footer_content %}
```

footer_left

Footer left side content.

Default:

```
{% block footer_left %}
  {% block footer_legal %}
    <strong>Copyright &copy; {% now "Y" %}.</strong> All rights reserved.
  {% endblock footer_legal %}
{% endblock footer_left %}
```

footer_right

Footer right side content.

Default:

```
<div class="pull-right hidden-xs">
  {% block footer_right %}
    <b>Version</b> {% block footer_version %}{{ ADMINLTE_FOOTER_VERSION }}{%
  ↪endblock footer_version %}
```

(continues on next page)

(continued from previous page)

```
{% endblock footer_right %}
</div>
```

footer_version

Footer version text.

Default:

```
<b>Version</b> {% block footer_version %}{{ ADMINLTE_FOOTER_VERSION }}{% endblock_
↪ footer_version %}
```

footer_legal

Footer legal text.

Default:

```
{% block footer_legal %}
    <strong>Copyright &copy; {% now "Y" %}</strong> All rights reserved.
{% endblock footer_legal %}
```

4.3 Pages

4.3.1 Login

login_logo

Login logo code.

Default:

```
{% block login_logo %}
    <div class="login-logo">
        <a href="{% block login_logo_href %}/{% endblock login_logo_href %}">
            {% block login_logo_text %}
                <b>Admin</b>LTE
            {% endblock login_logo_text %}
        </a>
    </div>
{% endblock login_logo %}
```

login_logo_href

Login logo link URL.

Defaults to /.

login_logo_text

Login logo content.

Default:

```
{% block login_logo_text %}
    <b>Admin</b>LTE
{% endblock login_logo_text %}
```

login_content

Login page main content code.

Default:

```
{% block login_content %}
    <div class="login-box-body">

        {% block messages_template %}
            {% include 'adminlte2/components/messages.html' %}
        {% endblock messages_template %}

        {% block login_custom_messages %}
        {% endblock login_custom_messages %}

        <p class="login-box-msg">
            {% block login_description %}
                Sign in to start your session
            {% endblock login_description %}
        </p>

        {% block login_form %}
            <form action="{% block login_form_action %}{% endblock login_form_
→action %}"
                                id="{% block login_form_id %}login-id{% endblock login_form_id
→%}"
                                method="{% block login_form_method %}POST{% endblock login_form_
→method %}">

                {% csrf_token %}

                {% if next %}
                    <input type="hidden" name="next" value="{{ next }}">
                {% endif %}

                {% block login_form_non_field_errors %}
                    {% if form.non_field_errors %}
                        <div class="text-danger">
                            {{ form.non_field_errors }}
                        </div>
                    {% endif %}
                {% endblock login_form_non_field_errors %}

                {% block login_form_fields %}
                    {% for field in form %}
                        <div class="form-group {% if field.errors %}has-error{% _
→endif %}">
                            {{ field.label_tag }}
                            {% if field.errors %}
                                <div class="text-danger">
                                    {{ field.errors }}
                                </div>
                            {% endif %}
                            {{ field|add_class:'form-control' }}
                            {% if field.help_text %}
                                <p class="help-block">{{ field.help_text|safe }}</
→p>
                            {% endif %}
                        </div>
                    {% endfor %}
                {% endblock login_form_fields %}
            </form>
        {% endblock login_form %}
    </div>
{% endblock login_content %}
```

(continues on next page)

(continued from previous page)

```

        {% block login_form_buttons %}
            <button class="btn btn-primary" type="submit">Log in</button>
            <button class="btn btn-default" type="reset">Clear</button>
        {% endblock login_form_buttons %}
    </form>
{% endblock login_form %}

<div class="social-auth-links text-center">
    {% block login_social_auth %}
    {% endblock login_social_auth %}
</div>

{% block login_links %}
{% endblock login_links %}
</div>
{% endblock login_content %}

```

messages_template

Django messages alert box template.

Default:

```

{% block messages_template %}
    {% include 'adminlte2/components/messages.html' %}
{% endblock messages_template %}

```

login_custom_messages

Custom Django messages alert boxes.

login_description

Login page description.

Defaults to Sign in to start your session.

login_form

Login form code.

Default:

```

{% block login_form %}
    <form action="{% block login_form_action %}{% endblock login_form_action %}"
        id="{% block login_form_id %}login-id{% endblock login_form_id %}"
        method="{% block login_form_method %}POST{% endblock login_form_method
↪ %}">

        {% csrf_token %}

        {% if next %}
            <input type="hidden" name="next" value="{{ next }}">
        {% endif %}

        {% block login_form_non_field_errors %}
            {% if form.non_field_errors %}
                <div class="text-danger">
                    {{ form.non_field_errors }}
                </div>
            {% endif %}

```

(continues on next page)

(continued from previous page)

```

{% endblock login_form_non_field_errors %}

{% block login_form_fields %}
    {% for field in form %}
        <div class="form-group {% if field.errors %}has-error{% endif %}">
            {{ field.label_tag }}
            {% if field.errors %}
                <div class="text-danger">
                    {{ field.errors }}
                </div>
            {% endif %}
            {{ field|add_class:'form-control' }}
            {% if field.help_text %}
                <p class="help-block">{{ field.help_text|safe }}</p>
            {% endif %}
        </div>
    {% endfor %}
{% endblock login_form_fields %}

{% block login_form_buttons %}
    <button class="btn btn-primary" type="submit">Log in</button>
    <button class="btn btn-default" type="reset">Clear</button>
{% endblock login_form_buttons %}
</form>
{% endblock login_form %}

```

login_form_aciton

Login <form> tag action attribute.

Defaults to blank.

login_form_id

Login <form> tag id attribute.

Defaults to login-id.

login_form_method

Login <form> tag method attribute.

Defaults to POST.

login_form_non_field_errors

Login non-field errors.

Default:

```

{% block login_form_non_field_errors %}
    {% if form.non_field_errors %}
        <div class="text-danger">
            {{ form.non_field_errors }}
        </div>
    {% endif %}
{% endblock login_form_non_field_errors %}

```

login_form_fields

Login form fields.

Default:

```
{% block login_form_fields %}
    {% for field in form %}
        <div class="form-group {% if field.errors %}has-error{% endif %}">
            {{ field.label_tag }}
            {% if field.errors %}
                <div class="text-danger">
                    {{ field.errors }}
                </div>
            {% endif %}
            {{ field|add_class:'form-control' }}
            {% if field.help_text %}
                <p class="help-block">{{ field.help_text|safe }}</p>
            {% endif %}
        </div>
    {% endfor %}
{% endblock login_form_fields %}
```

login_form_buttons

Login form buttons.

Default:

```
{% block login_form_buttons %}
    <button class="btn btn-primary" type="submit">Log in</button>
    <button class="btn btn-default" type="reset">Clear</button>
{% endblock login_form_buttons %}
```

login_social_auth

Login social authentication links.

login_links

Login links.

4.3.2 Register

register_logo

Register logo code.

Default:

```
{% block register_logo %}
    <div class="register-logo">
        <a href="{% block register_logo_href %}/{% endblock register_logo_href %}">
            {% block register_logo_text %}
                <b>Admin</b>LTE
            {% endblock register_logo_text %}
        </a>
    </div>
{% endblock register_logo %}
```

register_logo_href

Register logo link URL.

Defaults to /.

register_logo_text

Register logo content.

Default:

```
{% block register_logo_text %}
    <b>Admin</b>LTE
{% endblock register_logo_text %}
```

register_content

Register page main content code.

Default:

```
{% block register_content %}
    <div class="register-box-body">

        <p class="register-box-msg">
            {% block register_description %}
                Register a new membership
            {% endblock register_description %}
        </p>

        {% block register_form %}
            <form action="{% block register_form_action %}{% endblock register_
→form_action %}"
                id="{% block register_form_id %}register-id{% endblock register_
→form_id %}"
                method="{% block register_form_method %}POST{% endblock_
→register_form_method %}">
                {% csrf_token %}

                {% block register_form_non_field_errors %}
                    {% if form.non_field_errors %}
                        <div class="text-danger">
                            {{ form.non_field_errors }}
                        </div>
                    {% endif %}
                {% endblock register_form_non_field_errors %}

                {% block register_form_fields %}
                    {% for field in form %}
                        <div class="form-group {% if field.errors %}has-error{%
→endif %}">
                            {{ field.label_tag }}
                            {% if field.errors %}
                                <div class="text-danger">
                                    {{ field.errors }}
                                </div>
                            {% endif %}
                            {{ field|add_class:'form-control' }}
                            {% if field.help_text %}
                                <p class="help-block">{{ field.help_text|safe }}</
→p>
                            {% endif %}
                        </div>
                    {% endfor %}
                {% endblock register_form_fields %}

                {% block register_form_buttons %}
                    <button class="btn btn-primary" type="submit">Submit</button>
```

(continues on next page)

(continued from previous page)

```

        <button class="btn btn-default" type="reset">Clear</button>
    {% endblock register_form_buttons %}
</form>
{% endblock register_form %}

<div class="social-auth-links text-center">
    {% block register_social_auth %}
    {% endblock register_social_auth %}
</div>

{% block register_links %}
{% endblock register_links %}
</div>
{% endblock register_content %}

```

messages_template

Django messages alert box template.

Default:

```

{% block messages_template %}
    {% include 'adminlte2/components/messages.html' %}
{% endblock messages_template %}

```

register_custom_messages

Custom Django messages alert boxes.

register_description

Register page description.

Defaults to Register a new membership.

register_form

Register form code.

Default:

```

{% block register_form %}
    <form action="{% block register_form_action %}{% endblock register_form_
    ↪action %}"
        id="{% block register_form_id %}register-id{% endblock register_form_id
    ↪%}"
        method="{% block register_form_method %}POST{% endblock register_form_
    ↪method %}">
        {% csrf_token %}

        {% block register_form_non_field_errors %}
            {% if form.non_field_errors %}
                <div class="text-danger">
                    {{ form.non_field_errors }}
                </div>
            {% endif %}
        {% endblock register_form_non_field_errors %}

        {% block register_form_fields %}
            {% for field in form %}
                <div class="form-group {% if field.errors %}has-error{% endif %}">
                    {{ field.label_tag }}

```

(continues on next page)

(continued from previous page)

```

        {% if field.errors %}
            <div class="text-danger">
                {{ field.errors }}
            </div>
        {% endif %}
        {{ field|add_class:'form-control' }}
        {% if field.help_text %}
            <p class="help-block">{{ field.help_text|safe }}</p>
        {% endif %}
    </div>
{% endfor %}
{% endblock register_form_fields %}

{% block register_form_buttons %}
    <button class="btn btn-primary" type="submit">Register</button>
    <button class="btn btn-default" type="reset">Clear</button>
{% endblock register_form_buttons %}
</form>
{% endblock register_form %}

```

register_form_aciton

Register <form> tag action attribute.

Defaults to blank.

register_form_id

Register <form> tag id attribute.

Defaults to register-id.

register_form_method

Register <form> tag method attribute.

Defaults to POST.

register_form_non_field_errors

Register non-field errors.

Default:

```

{% block register_form_non_field_errors %}
    {% if form.non_field_errors %}
        <div class="text-danger">
            {{ form.non_field_errors }}
        </div>
    {% endif %}
{% endblock register_form_non_field_errors %}

```

register_form_fields

Register form fields.

Default:

```

{% block register_form_fields %}
    {% for field in form %}
        <div class="form-group {% if field.errors %}has-error{% endif %}">
            {{ field.label_tag }}
            {% if field.errors %}
                <div class="text-danger">

```

(continues on next page)

(continued from previous page)

```

        {{ field.errors }}
    </div>
{% endif %}
{{ field|add_class:'form-control' }}
{% if field.help_text %}
    <p class="help-block">{{ field.help_text|safe }}</p>
{% endif %}
</div>
{% endfor %}
{% endblock register_form_fields %}

```

register_form_buttons

Register form buttons.

Default:

```

{% block register_form_buttons %}
    <button class="btn btn-primary" type="submit">Register</button>
    <button class="btn btn-default" type="reset">Clear</button>
{% endblock register_form_buttons %}

```

register_social_auth

Register social authentication links.

register_links

Register links.

4.4 Extras

4.4.1 Paginator

paginator_template

Paginator template

Default:

```

{% block paginator_template %}

<nav {% if align %}class="{{ align }}" {% endif %}>
    <ul id="{% block paginator_id %}pagination{% endblock paginator_id %}" class="
→{% block paginator_class %}pagination{% if no_margin %} no-margin{% endif %}" %}
→endblock paginator_class %}">
        {% block paginator_content %}
            {% block first %}
                {% if show_first %}
                    <li>
                        <a href="?page=1">
                            {% block first_text %}<small>First</small>{% endblock
→first_text %}
                        </a>
                    </li>
                {% endif %}
            {% endblock first %}

            {% block prev %}

```

(continues on next page)

(continued from previous page)

```

        {% if has_prev %}
        <li>
            <a href="?page={{ prev_page }}">
                {% block prev_text %}<i class="fa fa-caret-left"></i>{
→% endblock prev_text %}
            </a>
        </li>
        {% endif %}
    {% endblock prev %}

    {% block pages %}
        {% for link_page in page_numbers %}
            {% ifequal link_page current_page %}
                {% block current %}
                    <li class="active">
                        <a href="?page={{ link_page }}">
                            {% block current_text %}
                                {{ current_page }}
                            {% endblock current_text %}
                        </a>
                    </li>
                {% endblock current %}
            {% else %}
                {% block link %}
                    <li>
                        <a href="?page={{ link_page }}">
                            {% block link_text %}
                                {{ link_page }}
                            {% endblock link_text %}
                        </a>
                    </li>
                {% endblock link %}
            {% endifequal %}
        {% endfor %}
    {% endblock pages %}

    {% block next %}
        {% if has_next %}
            <li>
                <a href="?page={{ next_page }}">
                    {% block next_text %}
                        <i class="fa fa-caret-right"></i>
                    {% endblock next_text %}
                </a>
            </li>
        {% endif %}
    {% endblock next %}

    {% block last %}
        {% if show_last %}
            <li>
                <a href="?page=last">
                    {% block last_text %}<small>Last</small>{% endblock_
→last_text %}
                </a>
            </li>
        {% endif %}
    
```

(continues on next page)

(continued from previous page)

```

        {% endblock last %}
    {% endblock paginator_content %}
</ul>
</nav>

{% endblock paginator_template %}

```

paginator_id

Paginator element id attribute, defaults to pagination.

paginator_class

Paginator element class names.

Default:

```

class="{% block paginator_class %}pagination{% if no_margin %} no-margin{% endif
→%}{% endblock paginator_class %}"

```

paginator_content

Paginator main content code.

first

First page link code.

Default:

```

{% block first %}
    {% if show_first %}
        <li>
            <a href="?page=1">
                {% block first_text %}<small>First</small>{% endblock first_text
→%}
            </a>
        </li>
    {% endif %}
{% endblock first %}

```

first_text

First page link text.

Default:

```

{% block first_text %}<small>First</small>{% endblock first_text %}

```

prev

Previous page link code.

Default:

```

{% block prev %}
    {% if has_prev %}
        <li>
            <a href="?page={{ prev_page }}">
                {% block prev_text %}<i class="fa fa-caret-left"></i>{% endblock_
→prev_text %}
            </a>
        </li>
    {% endif %}
{% endblock prev %}

```


prev_text

Previous page link text.

Default:

```
{% block prev_text %}<i class="fa fa-caret-left"></i>{% endblock prev_text %}
```

pages

Page number links code.

Default:

```
{% block pages %}
  {% for link_page in page_numbers %}
    {% ifequal link_page current_page %}
      {% block current %}
        <li class="active">
          <a href="?page={{ link_page }}">
            {% block current_text %}
              {{ current_page }}
            {% endblock current_text %}
          </a>
        </li>
      {% endblock current %}
    {% else %}
      {% block link %}
        <li>
          <a href="?page={{ link_page }}">
            {% block link_text %}
              {{ link_page }}
            {% endblock link_text %}
          </a>
        </li>
      {% endblock link %}
    {% endifequal %}
  {% endfor %}
{% endblock pages %}
```

current

Current page number link code.

Default:

```
{% block current %}
  <li class="active">
    <a href="?page={{ link_page }}">
      {% block current_text %}
        {{ current_page }}
      {% endblock current_text %}
    </a>
  </li>
{% endblock current %}
```

current_text

Current page number link text.

Default:

```
{% block current_text %}
    {{ current_page }}
{% endblock current_text %}
```

link

Adjacent page number link code.

Default:

```
{% block link %}
    <li>
        <a href="?page={{ link_page }}">
            {% block link_text %}
                {{ link_page }}
            {% endblock link_text %}
        </a>
    </li>
{% endblock link %}
```

link_text

Adjacent page number link text.

Default:

```
{% block link_text %}
    {{ link_page }}
{% endblock link_text %}
```

next

Next page link code.

Default

```
{% block next %}
    {% if has_next %}
        <li>
            <a href="?page={{ next_page }}">
                {% block next_text %}
                    <i class="fa fa-caret-right"></i>
                {% endblock next_text %}
            </a>
        </li>
    {% endif %}
{% endblock next %}
```

next_text

Next page link text.

Default:

```
{% block next_text %}
    <i class="fa fa-caret-right"></i>
{% endblock next_text %}
```

last

Last page link code.

Default:

```
{% block last %}
    {% if show_last %}
        <li>
            <a href="?page=last">
                {% block last_text %}<small>Last</small>{% endblock last_text %}
            </a>
        </li>
    {% endif %}
{% endblock last %}
```

last_text

Last page link text.

Default:

```
{% block last_text %}<small>Last</small>{% endblock last_text %}
```

Template Tags and Filters

django-adminlte2-templates provides several template tags and filters that can be used by adding `{% load adminlte2_tags %}` to your layout templates:

5.1 Tags

{% add_active %}

Add HTML class name `active` to sidebar and header navigation links based on comparison of given URL pattern with current URL.

Parameters:

url_pattern: (*str*) URL pattern for `reverse` matching or raw URL string.

exact_match: (*bool, optional*) Toggle for exact matching, defaults to `False`.

not_when: (*str, optional*) Comma-separated string of patterns that will render comparison as `False`, defaults to `''`.

***args and **kwargs** For URL `reverse` matching.

Example:

```
<li class="{% add_active 'app:page' object.pk %}">
  <a href="{% url 'app:page' object.pk %}">Details</a>
</li>
```

{% gravatar_url %}

Generates a [Gravatar URL](#) based on the details of the current user.

For your convenience, you can also set the parameters related to this tag in Django `settings.py`. Please check the [Settings > Gravatar](#) section for more information.

To know more about Gravatar request parameters, please check the [Gravatar Image Request documentation](#) for more information.

Parameters:

user: (*User object, optional*) User object, defaults to context `user`.

size: (*int, optional*) Image size. You may request images anywhere from 1 up to 2048, however note that many users have lower resolution images, so requesting larger sizes may result in pixelation/low-quality images. Defaults to 80.

default: (*str, optional*) Default Gravatar image to load. You can supply your own default image by supplying the URL to an image. Alternatively, you can use any of these valid values: '404', 'mp', 'identicon', 'monsterid', 'wavatar', 'retro', 'robohash', 'blank'. Defaults to 'mp'.

force_default: (*bool, optional*) Toggle to force load default Gravatar image, defaults to `False`.

rating: (*str, optional*) Gravatar image rating. Valid values are: 'g', 'pg', 'r', 'x'. Defaults to 'pg'.

Example:

```

```

{% paginator %}

Generates an HTML code block for ListView pagination. HTML code output is based on template layout `adminlte2/extras/paginator.html`.

You can customize the output by overriding the aforementioned layout and using the template blocks related to this tag. Please check the [Template Blocks > Extras > Paginator](#) section for more information.

Parameters:

adjacent_pages (*int, optional*) Adjacent page links to current page link, defaults to 2.

align (*str, optional*) Element alignment. Valid values are 'initial', 'center', 'left', 'right', defaults to 'initial'.

no_margin (*bool, optional*) Toggle to remove margin around element, defaults to `False`.

Example:

```
{% if is_paginated %}
    {% paginator adjacent_pages=2 align="center" no_margin=True %}
{% endif %}
```

{% page_title %}

Generates text for HTML `<title>` tag. Supports Django sites framework and ListView pagination.

You can customize the output by using the settings related to this tag in Django `settings.py`. Please check the [Settings > Page Title](#) section for more information.

Parameters:

page_name (*str, optional*) Page title text. Adding `page_name` to the page context will override this parameter. Defaults to ''.

Example:

```
{% block title %}{% page_title 'Page Title' %}{% endblock title %}
```

5.2 Filters

add_class

Add HTML class names to a form field.

Example:

```
{% for field in form %}
  <div class="form-group {% if field.errors %}has-error{% endif %}">
    {{ field.label_tag }}
    {% if field.errors %}
      <div class="text-danger">
        {{ field.errors }}
      </div>
    {% endif %}
    {{ field|add_class:'form-control' }}
    {% if field.help_text %}
      <p class="help-block">{{ field.help_text|safe }}</p>
    {% endif %}
  </div>
{% endfor %}
```

add_attr

Add HTML attribute values to a form field.

Example:

```
{% for field in form %}
  <div class="form-group {% if field.errors %}has-error{% endif %}">
    {{ field.label_tag }}
    {% if field.errors %}
      <div class="text-danger">
        {{ field.errors }}
      </div>
    {% endif %}
    {% if field.is_readonly %}
      {{ field.field|add_attr:'readonly' }}
    {% else %}
      {{ field.field }}
    {% endif %}
    {% if field.help_text %}
      <p class="help-block">{{ field.help_text|safe }}</p>
    {% endif %}
  </div>
{% endfor %}
```


django-adminlte2-templates settings.py variables:

6.1 CDN

ADMINLTE_USE_CDN

(*bool*) Toggle to use CDN links for AdminLTE dependencies.

Defaults to False.

ADMINLTE_CDN_ADMINLTE_CSS_CORE

(*str*) CDN link for AdminLTE 2.4.18 core CSS file.

Defaults to 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/AdminLTE.min.css'.

ADMINLTE_CDN_ADMINLTE_CSS_SKIN

(*dict*) CDN links for AdminLTE 2.4.18 skin CSS files.

Valid keys are: 'skin-black', 'skin-black-light', 'skin-blue', 'skin-blue-light', 'skin-green', 'skin-green-light', 'skin-purple', 'skin-purple-light', 'skin-red', 'skin-red-light', 'skin-yellow', 'skin-yellow-light'.

Default:

```
{
    'skin-black': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/
↪skins/skin-black.min.css',
    'skin-black-light': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/
↪css/skins/skin-black-light.min.css',
    'skin-blue': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/
↪skins/skin-blue.min.css',
    'skin-blue-light': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/
↪css/skins/skin-blue-light.min.css',
    'skin-green': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/
↪skins/skin-green.min.css',
```

(continues on next page)

(continued from previous page)

```
'skin-green-light': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/
↪css/skins/skin-green-light.min.css',
'skin-purple': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/
↪skins/skin-purple.min.css',
'skin-purple-light': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/
↪css/skins/skin-purple-light.min.css',
'skin-red': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/
↪skins/skin-red.min.css',
'skin-red-light': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/
↪css/skins/skin-red-light.min.css',
'skin-yellow': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/css/
↪skins/skin-yellow.min.css',
'skin-yellow-light': 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/
↪css/skins/skin-yellow-light.min.css',
}
```

ADMINLTE_CDN_ADMINLTE_JS_CORE

(*str*) CDN link for AdminLTE 2.4.18 core JS file.

Defaults to 'https://cdnjs.cloudflare.com/ajax/libs/admin-lte/2.4.18/js/adminlte.min.js'.

ADMINLTE_CDN_BOOTSTRAP_CSS_CORE

(*str*) CDN link for Bootstrap 3.4.1 core CSS file.

Defaults to 'https://cdnjs.cloudflare.com/ajax/libs/twitter-bootstrap/3.4.1/css/bootstrap.min.css'.

ADMINLTE_CDN_BOOTSTRAP_JS_CORE

(*str*) CDN link for Bootstrap 3.4.1 core JS file.

Defaults to 'https://cdnjs.cloudflare.com/ajax/libs/twitter-bootstrap/3.4.1/js/bootstrap.min.js'.

ADMINLTE_CDN_DATATABLES_CSS_CORE

(*str*) CDN link for DataTables 1.10.21 core CSS file.

Defaults to 'https://cdn.datatables.net/1.10.21/css/jquery.dataTables.min.css'.

ADMINLTE_CDN_DATATABLES_JS_CORE

(*str*) CDN link for DataTables 1.10.21 core JS file.

Defaults to 'https://cdn.datatables.net/1.10.21/js/jquery.dataTables.min.js'.

ADMINLTE_CDN_FONTAWESOME_CSS_CORE

(*str*) CDN link for Font-Awesome 4.7.0 core CSS file.

Defaults to 'https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css'.

ADMINLTE_CDN_JQUERY_JS_CORE

(*str*) CDN link for jQuery 3.5.1 JS file.

Defaults to 'https://cdnjs.cloudflare.com/ajax/libs/jquery/3.5.1/jquery.min.js'.

ADMINLTE_CDN_HTML5SHIV_JS_CORE

(*str*) CDN link for HTML5 Shim script HTML5 Shiv JS file.

Defaults to 'https://oss.maxcdn.com/html5shiv/3.7.3/html5shiv.min.js'.

ADMINLTE_CDN_RESPOND_JS_CORE

(*str*) CDN link for HTML5 Shim script Respond JS file.

Defaults to 'https://oss.maxcdn.com/respond/1.4.2/respond.min.js'.

ADMINLTE_CDN_SELECT2_CSS_CORE

(*str*) CDN link for Select2 4.0.13 core CSS file

Defaults to 'https://cdn.jsdelivr.net/npm/select2@4.0.13/dist/css/select2.min.css'.

ADMINLTE_CDN_SELECT2_JS_CORE

(*str*) CDN link for Select2 4.0.13 core JS file

Defaults to 'https://cdn.jsdelivr.net/npm/select2@4.0.13/dist/js/select2.min.js'.

6.2 Footer

ADMINLTE_FOOTER_VERSION

(*str*) Footer version number text, defaults to '1.0.0'.

6.3 Gravatar

Global parameter values for template tag {% gravatar_url %}. Please check the [Template Tags > Tags](#) section for more information on {% gravatar_url %}.

ADMINLTE_GRAVATAR_SIZE

(*int*) Default Gravatar image size.

You may request images anywhere from 1 up to 2048, however note that many users have lower resolution images, so requesting larger sizes may result in pixelation/low-quality images.

Defaults to 80.

ADMINLTE_GRAVATAR_DEFAULT

(*str*) Default Gravatar image to load.

You can supply your own default image by supplying the URL to an image. Alternatively, you can use any of these valid values: '404', 'mp', 'identicon', 'monsterid', 'wavatar', 'retro', 'robohash', 'blank'.

Defaults to 'mp'.

ADMINLTE_GRAVATAR_FORCE_DEFAULT

(*bool*) Toggle to force load the default Gravatar image.

Defaults to False.

ADMINLTE_GRAVATAR_RATING

(*str*) Gravatar image rating.

Valid values are: 'g', 'pg', 'r', 'x'.

Defaults to 'pg'.

6.4 HTML

ADMINLTE_USE_SHIM

(*bool*) Toggle to use HTML5 Shim for IE9 support.

Defaults to `False`.

ADMINLTE_HTML_LANG_BIDI

(*str*) HTML `dir` attribute value for handling bidirectional text.

Valid values are `'ltr'`, `'rtl'`, `'auto'`.

Defaults to `'ltr'`.

6.5 Page Title

Settings to customize template tag `{% page_title %}` output. Please check the [Template Tags > Tags](#) section for more information on `{% page_title %}`.

ADMINLTE_TITLE_FORMAT

(*str*) Page title string format.

Supported string format parameters are:

- **site**: Site name
- **divider**: Divider character between the site name and current page name
- **page**: Current page name

Defaults to `'{site} {divider} {page}'`.

ADMINLTE_TITLE_FORMAT_PAGINATION

(*str*) Page title string format for pages with pagination (ListView, etc.)

Supported string format parameters are:

- **site**: Site name
- **divider**: Divider character between the site name and current page name
- **page**: Current page name
- **curr_no**: Current page number
- **last_no**: Last page number

Defaults to `'{site} {divider} {page} ({curr_no} of {last_no})'`.

ADMINLTE_TITLE_SITE

(*str*) Page title site name text.

Defaults to `'AdminLTE'`.

ADMINLTE_TITLE_DIVIDER

(*str*) Page title divider for page name and site name.

Defaults to `'|'`.

6.6 Static

ADMINLTE_STATIC_ENABLE_DATATABLES

(*bool*) Toggle to enable the Datatables library (<https://www.datatables.net/>) included out-of-the-box.

Defaults to `True`.

ADMINLTE_STATIC_ENABLE_FONTAWESOME

(*bool*) Toggle to enable the Font Awesome library (<https://fontawesome.com/v4.7.0/icons/>) included out-of-the-box.

Defaults to `True`.

ADMINLTE_STATIC_ENABLE_SELECT2

(*bool*) Toggle to enable the Select2 library (<https://select2.org/>) included out-of-the-box.

Defaults to `True`.

6.7 Theme

ADMINLTE_SKIN_STYLE

(*str*) Default AdminLTE skin style.

Valid values are: `'skin-black'`, `'skin-black-light'`, `'skin-blue'`, `'skin-blue-light'`, `'skin-green'`, `'skin-green-light'`, `'skin-purple'`, `'skin-purple-light'`, `'skin-red'`, `'skin-red-light'`, `'skin-yellow'`, `'skin-yellow-light'`.

Defaults to `'skin-blue'`.

ADMINLTE_CONTROL_STYLE

(*str*) Default AdminLTE control sidebar style.

Valid values are: `'control-sidebar-dark'`, `'control-sidebar-light'`.

Defaults to `'control-sidebar-dark'`.

7.1 1.4.0 (Sep-17-2020)

- Updated documentation. Added changelog page.
- Updated example project `example_project`
- Added optional Django Admin custom AdminLTE2 theme (add `adminlte2_admin` to `INSTALLED_APPS`)
- **Pages**

– Login

- * Updated login form template texts from Login to Log In
- * Added template block `{% block message_template %}` to accommodate Django messages
- * Added new login form-specific template blocks `{% block login_custom_messages %}`, `{% block login_form_non_field_errors %}`, `{% block login_form_fields %}`, `{% block login_form_buttons %}`, `{% block login_form_action %}`, `{% block login_form_id %}`, and `{% block login_form_method %}`

– Register

- * Fixed HTML element `<p class="login-box-msg">` to `<p class="register-box-msg">`
- * Updated register form template submit button text from Submit to Register
- * Added template block `{% block message_template %}` to accommodate Django messages
- * Added new register form-specific template blocks `{% block register_custom_messages %}`, `{% block register_form_non_field_errors %}`, `{% block register_form_fields %}`, `{% block register_form_buttons %}`, and `{% block register_form_method %}`

```
register_form_action %}, {% block register_form_id %}, and {%
block register_form_method %}
```

- **Template tags**

- Added new template tag `{% add_attr %}` that adds attribute name values to Django template form fields

7.2 1.3.2 (May-27-2020)

- Fixed template tag `{% gravatar_url %}` to add the Gravatar f URL parameter only if `force_default` is `True`
- Updated template tag `{% add_active %}` to support raw URL string

7.3 1.3.1 (May-16-2020)

- Updated `adminlte2/fix/header_dropdown_link_color.css` to support mobile view and *top navigation* left header items
- Updated example project `example_project`

7.4 1.3.0 (May-15-2020)

- Updated example project `example_project`
- Deployed a live version of the example project at <https://djangoadminlte2templates.pythonanywhere.com>
- **Layouts**
 - New component layout template `adminlte2/components/footer_top_navigation.html` for *top navigation* footer
- **Static files**
 - Updated jQuery version from 3.4.1 to 3.5.1
 - Added DataTables 1.10.21 and Select2 4.0.13
 - Added custom CSS `fix/header_dropdown_link_color.css` to fix header dropdown link colors
- **Settings**
 - Added new settings `ADMINLTE_HTML_LANG_BIDI` to manage `<html>` dir attribute value for handling bidirectional text
 - Added new settings `ADMINLTE_FOOTER_VERSION` to manage the footer version text
 - Added new settings `ADMINLTE_STATIC_ENABLE_DATATABLES`, `ADMINLTE_STATIC_ENABLE_FONTAWESOME`, `ADMINLTE_STATIC_ENABLE_SELECT2` to manage the enabling of these optional static files
 - Added new settings `ADMINLTE_CDN_DATATABLES_CSS_CORE`, `ADMINLTE_CDN_DATATABLES_JS_CORE` to manage DataTables' CDN links

- Added `new` settings `ADMINLTE_CDN_SELECT2_CSS_CORE`, `ADMINLTE_CDN_SELECT2_JS_CORE` to manage Select2's CDN links

- **Template tags**

- Fixed 'sites' framework support for `{% page_title %}` template tag
- **Updated `{% gravatar_url %}` template tag:**
 - * `{% gravatar_url %}` now returns a `TemplateSyntaxError` exception if any of the `size`, `default`, and `rating` parameters is not of valid value
 - * Returned URL string is now enclosed in `mark_safe()`, disabling string auto escape
- **Updated `{% paginator %}` template tag:**
 - * `adjacent_pages` parameter is now strictly applied to the left and right side of the current page link
 - * `{% paginator %}` now returns a `TemplateSyntaxError` exception if the `align` parameter is not of valid value.
 - * Added new template block `{% paginator_id %}` for the paginator `<ul>` element `id` attribute, defaults to "pagination"
 - * Paginator `<ul>` element is now enclosed in a `<nav>` tag instead of `<div>`

- **Template blocks**

- Added new block `extra_head` in base template for adding HTML tags in `<head>`
- Added new block `html_lang_bidi` in base template for managing `<html>` `dir` attribute
- Added new block `paginator_id` in `extras/paginator.html` for managing the paginator element `id` attribute
- Added new block `stylesheets_fix` in base template for custom CSS fixes

- **Build**

- Added unit tests for custom template tags and filters, context processors, and template files
- Added ESLint configuration file
- Added StyleLint configuration file
- Added coverage.py configuration file
- Added tox configuration file
- Added Codecov integration for code coverage
- Added CodeFactor.io integration for code quality
- Added Travis CI integration for continuous integration

7.5 1.2.0 (Apr-19-2020)

- Updated `{% block login_logo_href %}` and `{% block register_logo_href %}` default value to `/`
- Updated example Django project `example_project`
- Added new `Shortcuts` layout template `"no_breadcrumbs_footer/*"` that removes footer component and breadcrumb navigation

- Added new template tag `{% page_title %}` that generates text for HTML `<title>`

7.6 1.1.0 (Apr-13-2020)

- Fixed code to support Python 2.7 and `<=Django 1.11`
- Updated `adminlte2/layouts/login.html` to work out-of-the-box with `LoginView`
- Updated `adminlte2/layouts/register.html` to work out-of-the-box with `UserCreationForm`
- Updated setting `ADMINLTE_HTML_LANG` to base its default value from Django setting `LANGUAGE_CODE`
- Added new template filter `add_class` that adds class name values to Django template form fields
- Added new template tag `{% gravatar_url %}` that generates a Gravatar image URL based on current user details
- Added new template tag `{% paginator %}` that generates an HTML code block for `ListView` pagination
- Added new settings `ADMINLTE_GRAVATAR_SIZE`, `ADMINLTE_GRAVATAR_DEFAULT`, `ADMINLTE_GRAVATAR_FORCE_DEFAULT`, `ADMINLTE_GRAVATAR_RATING`

CHAPTER 8

Links

- Documentation: <https://django-adminlte2-templates.readthedocs.io/en/latest/>
- Source Code: <https://github.com/josemarimanio/django-adminlte2-templates/>
- Package: <https://pypi.org/project/django-adminlte2-templates/>
- AdminLTE 2: <https://adminlte.io/themes/AdminLTE/index2.html/>

A

ADMINLTE_CDN_ADMINLTE_CSS_CORE (in module *adminlte2_templates.constants*), 45
ADMINLTE_CDN_ADMINLTE_CSS_SKIN (in module *adminlte2_templates.constants*), 45
ADMINLTE_CDN_ADMINLTE_JS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_BOOTSTRAP_CSS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_BOOTSTRAP_JS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_DATATABLES_CSS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_DATATABLES_JS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_FONTAWESOME_CSS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_HTML5SHIV_JS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_JQUERY_JS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_RESPOND_JS_CORE (in module *adminlte2_templates.constants*), 46
ADMINLTE_CDN_SELECT2_CSS_CORE (in module *adminlte2_templates.constants*), 47
ADMINLTE_CDN_SELECT2_JS_CORE (in module *adminlte2_templates.constants*), 47
ADMINLTE_CONTROL_STYLE (in module *adminlte2_templates.constants*), 49
ADMINLTE_FOOTER_VERSION (in module *adminlte2_templates.constants*), 47
ADMINLTE_GRAVATAR_DEFAULT (in module *adminlte2_templates.constants*), 47
ADMINLTE_GRAVATAR_FORCE_DEFAULT (in module *adminlte2_templates.constants*), 47
ADMINLTE_GRAVATAR_RATING (in module *adminlte2_templates.constants*), 47
ADMINLTE_GRAVATAR_SIZE (in module *adminlte2_templates.constants*), 47

ADMINLTE_HTML_LANG_BIDI (in module *adminlte2_templates.constants*), 48
ADMINLTE_SKIN_STYLE (in module *adminlte2_templates.constants*), 49
ADMINLTE_STATIC_ENABLE_DATATABLES (in module *adminlte2_templates.constants*), 49
ADMINLTE_STATIC_ENABLE_FONTAWESOME (in module *adminlte2_templates.constants*), 49
ADMINLTE_STATIC_ENABLE_SELECT2 (in module *adminlte2_templates.constants*), 49
ADMINLTE_TITLE_DIVIDER (in module *adminlte2_templates.constants*), 48
ADMINLTE_TITLE_FORMAT (in module *adminlte2_templates.constants*), 48
ADMINLTE_TITLE_FORMAT_PAGINATION (in module *adminlte2_templates.constants*), 48
ADMINLTE_TITLE_SITE (in module *adminlte2_templates.constants*), 48
ADMINLTE_USE_CDN (in module *adminlte2_templates.constants*), 45
ADMINLTE_USE_SHIM (in module *adminlte2_templates.constants*), 48

C

control_template (built-in variable), 18

F

footer_template (built-in variable), 18

H

header_toggle_text (built-in variable), 23

L

last (built-in variable), 38
last_text (built-in variable), 39
link_text (built-in variable), 38
login_custom_messages (built-in variable), 28
login_form_aciton (built-in variable), 29
login_form_buttons (built-in variable), 30

`login_form_fields` (*built-in variable*), 29
`login_form_id` (*built-in variable*), 29
`login_form_method` (*built-in variable*), 29
`login_form_non_field_errors` (*built-in variable*), 29

M

`messages_template` (*built-in variable*), 18, 28, 32

N

`next` (*built-in variable*), 38
`next_text` (*built-in variable*), 38

R

`register_custom_messages` (*built-in variable*), 32
`register_form_aciton` (*built-in variable*), 33
`register_form_buttons` (*built-in variable*), 34
`register_form_fields` (*built-in variable*), 33
`register_form_id` (*built-in variable*), 33
`register_form_method` (*built-in variable*), 33
`register_form_non_field_errors` (*built-in variable*), 33